


THE POWER OF SIMPLICITY



Refining The Workflow

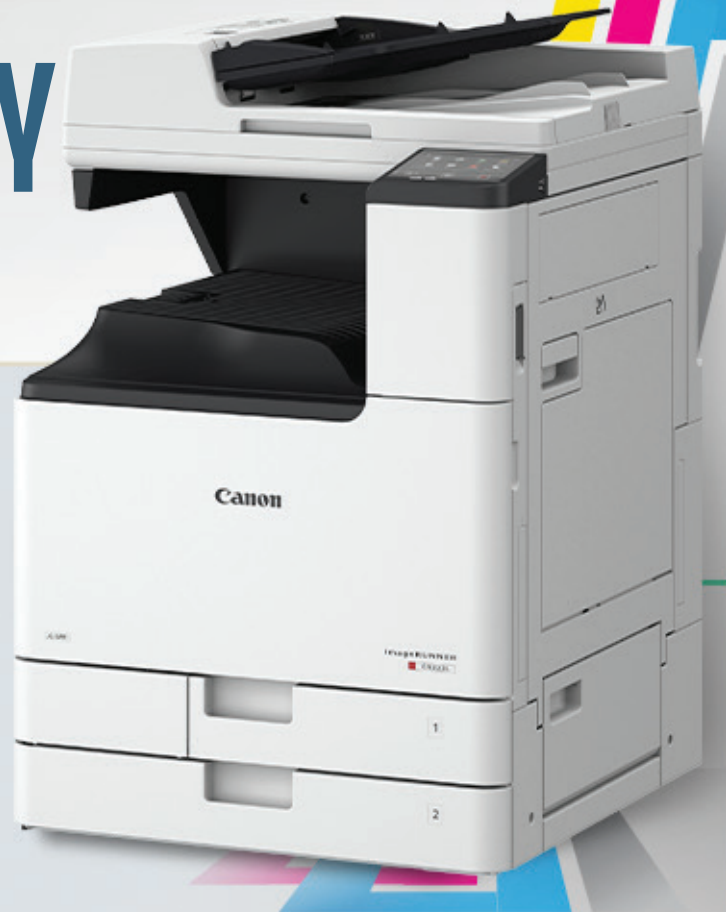

The essentials that keep your workflow seamless and concise. The new imageRUNNER C3222L packs easy-to-use features that powers you through routine operations with efficiency and productivity.



FUNCTIONS AT A TAP

-  5" touch panel
-  Simple and intuitive touch navigations
-  Application Library offers up to 12 different applications
-  Customisable home screen layout

PRODUCTIVITY

-  Scan to e-mail/ folders (JPEG, TIFF & Compact PDF)
-  Store frequently used templates
-  One-touch operations with customisable settings

MOBILE PRINTING

-  Wi-fi connect via scanning of QR code
-  Print/ Scan easily with Canon PRINT Business Application.



RETHINK SECURITY

-  Up-to-date security
-  uniFLOW Online/ Online Express
-  Data & document protection
-  Device & network protection

Business Can Be Simple



You can download from app store or Google Play

SPECIFICATION

MAIN UNIT	
Machine type	A3 Color Laser Multifunctional
Core functions	Print, Copy, Scan and Send
Control panel	5 inch TFT LCD WVGA color Touch panel
Memory	1.0GB RAM
Storage	eMMC: 2GB
Interface connection	Network 100Base-TX/10Base-T, Wireless LAN (IEEE 802.11 b/g/n) Others USB 2.0 (Host) x2, USB 2.0 (Device) x1
Paper supply capacity (A4, 80 gsm)	Standard: 960 sheets (480-sheets Paper Cassette x 2) Maximum: 960 sheets
Paper output capacity (A4, 80 gsm)	Standard: 220 Sheets Maximum: 220 Sheets
Supported media types	Upper/Lower Cassette: Plain, Recycled, Colour, Pre-punched
Supported media sizes	Upper Cassette: Standard size: A4 Lower Cassette: Standard size: A3, A4, A4R, A5R Custom Size: 139.7 x 210.0 mm up to 297.0 x 431.8 mm
Supported media weights	Upper/Lower Cassette: 64 to 90 gsm Duplex: 64 to 90 gsm
Warm-up time (Quick start mode: ON)	14.2 Seconds or Less* *Time from device power on to when copy icon appears and is enabled to operate on the touch panel display. From Sleep Mode: 10 seconds or less 19 Seconds or Less* *Time from device power on, until copy ready (not print reservation)
Dimensions (W X D X H)	565 x 653 x 863 mm (with DADF-AZ2)
Installation space (W X D)	940 x1106 mm
Weight	Approx. 67.1 kg including toner
PRINT SPECIFICATIONS	
Print speed (BW/CL)	Up to 22/22 ppm (A4, A5R) , Up to 12/12 ppm (A3, A4R)
Print resolution (dpi)	600 x600 1200 x1200 (half-speed)
Page description languages	UFR II
Direct print	Supported file types: USB Memory: PDF, TIFF/JPEG
Printing from mobile and cloud application	AirPrint, Mopria, Canon PRINT Business and uniFLOW Online
Operating system	UFR II: Windows® 8.1/10/Server 2012/Server 2012 R2/Server 2016/Server 2019, MAC OS X (10.11 or later)
COPY SPECIFICATIONS	
Copy speed (BW/CL)	Up to 22/22 ppm (A4, A5R) , Up to 12/12 ppm (A3, A4R)
First-copy-out time (A4, BW/CL)	Approx. 6.9 / 9.8 seconds or less
Copy resolution (dpi)	600 x 600: BW(default setting) 300 x 600: Colour/ACS 300 x 300: Colour
Multiple copies	Up to 999 copies
Copy density	Automatic or Manual (9 Levels)
Magnification	25% - 400% (1% Increments) Preset reduction/enlargement: 25%, 50%, 61%, 70%, 81%, 86%, 100%, 115%, 122%, 141%, 200%, 400%

SCAN SPECIFICATIONS	
Type	Optional: DADF-AZ2 [2-sided to 2-sided] or Platen Cover-AA2
Document feeder paper capacity (80 gsm)	DADF-AZ2 up to 50 sheets
Acceptable originals and weights	Platen: Sheet, Book Document Feeder media weight: 1-sided scanning: 38 to 128 gsm 2-sided scanning: 52 to 128 gsm
Supported media sizes	Platen: max. scanning size: 297.0 x 431.8 mm Document Feeder media size: A3, A4, A4R, A5, A5R, B4, B5, B5R Custom size: 128.0 x 148.0 mm to 297.0 x 431.8 mm
Scan speed (ipm: BW/CL; A4)	DADF-AZ2: 1-sided Scanning: 30/30 (300 x 300 dpi, send), 25/30 ^{1,2,3} (600 x 600 dpi, copy) 2-sided Scanning: 10/10 (300 x 300 dpi, send), 8/10 ^{1,2,3} (600 x 600 dpi, copy) ¹ Scan Speed Priority (300 dpi x 300 dpi) (default setting) ² Image Quality Priority mode (300 dpi x 600 dpi) ³ When CL scanning in Speed Priority Mode and in Image Quality Priority Mode
Scan resolution (dpi)	Scan for Copy: Up to 600 x 600 Scan for Send: Push: BW: up to 600 x 300, CL: up to 300 x 600 Pull: BW: up to 600 x 600, CL: up to 300 x 600
Pull scan specifications	ScanGear MF, For both TWAIN and WIA Supported OS: Windows®8.1/10/Mac OS X10.11- 11

SEND SPECIFICATIONS	
Destination	Standard: E-mail/Internet FAX (SMTP), SMB3.0, FTP
Address book	LDAP (50)/Local (300)/One-touch (281)
Send resolution (dpi)	Push: 300 x 300 (E-mail/SMB/FTP), 192 x 204 (IFAX) Pull: 50 x 50, 75 x 75, 100 x 100, 150 x 150, 200 x 200, 300 x 300, 400 x 400*, 600 x 600* *color mode is black and white only
Communication protocol	File: FTP (TCP/IP), SMB3.0 (TCP/IP) E-mail/iFax: SMTP(send), POP3(receive)
File format	Standard: TIFF, JPEG*, PDF (Compact, Searchable, Encrypted, Digital Signature) *Single page only

ENVIRONMENTAL SPECIFICATIONS	
Operating environment	Temperature: 10 to 30 °C Humidity: 20 to 80% RH (Relative Humidity)
Power source	220-240V 50/60Hz, 4A
Power consumption	Maximum: Approx. 1,500 W Standby: 220-240V Approx. 29.3 W ¹ Sleep mode: Approx. 2.0 W ² , Approx. 1.0 W ³ ¹ Reference value: measured one unit ² Wireless LAN power save mode OFF ³ Wireless LAN power save mode ON ^{2,3} Sleep mode is not available in all circumstances due to certain settings.

CONSUMABLES	
Toner yield (Estimated @ 5% coverage)	NPG-67L TONER C/M/Y: 2,500 pages NPG-67 TONER BK: 36,000 pages NPG-67 TONER BK/C/M/Y: 19,000 pages

OTHER ACCESSORIES	
DADF-AZ2, Platen Cover- AA2, ADF Access Handle-A1	

Canon
Delighting You Always

SOUTH & SOUTHEAST ASIA REGIONAL HEADQUARTERS

CANON SINGAPORE PTE. LTD.

1 Fusionpolis Place #14-10 Galaxis, Singapore 138522
Tel: 65-6799-8888 | Fax: 65-6799-8882 | <https://asia.canon>

DEALER'S STAMP